


# Odin Down Lights

ITEM SKU#: 662187497983

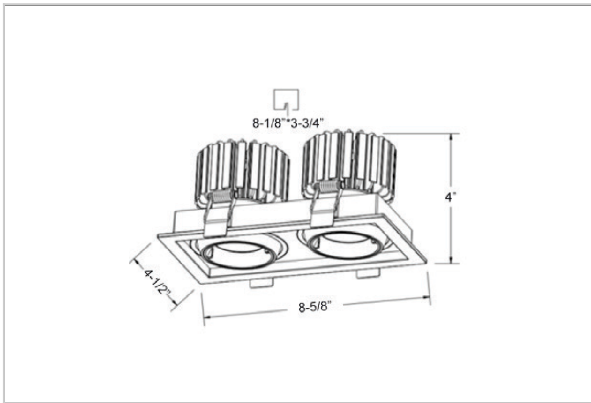

## Product Code : IK-RODINDL-30W-30K-WH-90C-36D

|                    |   |
|--------------------|---|
| Voltage            | 100 - 277 V AC, 50-60 Hz  |
| Lumen Output       | 5050lm  |
| Power              | 30W   |
| Efficacy           | 140lm/w   |
| CCT                | 3000K   |
| CRI                | >90   |
| Beam Angle         | 36°   |
| Light Distribution | Flood   |
| LED Light Source   | Osram SOLERIQ S 19  |
| Start Time         | Instant   |
| Driver             | Stand Alone (included)  |
| Operating Position | Swiveling Type, 360D  |
| Dimming            | On-Off / Triac / 0-10 V   |
| Construction       | Sqaure  |
| Mounting Type      | Recessed  |
| Heads              | Double Head   |
| Body Material      | Aluminium Die cast  |
| Finish             | White   |
| Length             | 8-1/4"  |
| Height             | 4-1/8"  |
| Cut Out            | 7-1/2"  |
| Optics             | Darklight Technology Black, Silver  |
| Width (W)          | 4-1/2"  |
| Application Area   | Guest Room, Corridor, Restaurant, Meeting Room Club, Hall, Hotel Entrance |



### Beam Spread (Options)

| Spot | 15°  |      | 24°  |      | 36°   |   |
|------|------|------|------|------|-------|---|
|      | ft   | Ø    | ft   | Ø    | ft    | Ø |
| 3.0  | 0.72 | 3.0  | 1.41 | 3.0  | 2.03  |   |
| 9.0  | 2.15 | 9.0  | 4.22 | 9.0  | 6.09  |   |
| 15.0 | 3.58 | 15.0 | 7.04 | 15.0 | 10.15 |   |

Create the desired lighting effect in your stores with IKIO's Odin, a twin square LED downlight made of aluminum die cast with high quality powder coated luminaire housing and optimum heat sink. These properties of the luminaire contribute to its effective functioning for a longer time period. Moreover, available in multiple wattages, color temperatures, finishes, and beam angles, this luminaire offers greater flexibility in its application.