


Odin Down Lights



Product Code : IK-RODINDL-55W-40K-WH-90C-15D

Voltage	100 - 277 V AC, 50-60 Hz
Lumen Output	8400lm
Power	55W
Efficacy	140lm/w
CCT	4000K
CRI	>90
Beam Angle	15°
Light Distribution	Spot
LED Light Source	Osram SOLERIQ S 19
Start Time	Instant
Driver	Stand Alone (included)
Operating Position	Swiveling Type, 360D
Dimming	On-Off / Triac / 0-10 V
Construction	Sqaure
Mounting Type	Recessed
Heads	Double Head
Body Material	Aluminium Die cast
Finish	White
Length	9-7/8"
Height	4-7/8"
Cut Out	9"x4-7/8"
Optics	Darklight Technology Black, Silver
Width (W)	5-1/2"
Application Area	Guest Room, Corridor, Restaurant, Meeting Room Club, Hall, Hotel Entrance

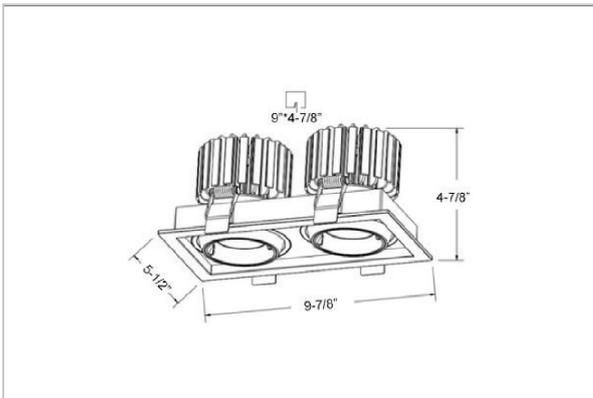

Beam Spread (Options)

Spot	15°		Medium		24°		Flood		36°		
	ft	Ø	ft	Ø	ft	Ø	ft	Ø	ft	Ø	
3.0	0.72	3.0	1.41	3.0	2.03	3.0	2.03	15.0	7.04	15.0	10.15
9.0	2.15	9.0	4.22	9.0	6.09	9.0	6.09				
15.0	3.58										

Create the desired lighting effect in your stores with IKIO's Odin, a twin square LED downlight made of aluminum die cast with high quality powder coated luminaire housing and optimum heat sink. These properties of the luminaire contribute to its effective functioning for a longer time period. Moreover, available in multiple wattages, color temperatures, finishes, and beam angles, this luminaire offers greater flexibility in its application.