


Olivio Down Lights

ITEM SKU#: 662187499697

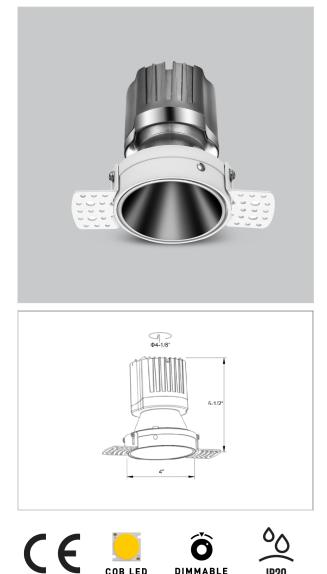

Product Code : IK-ROLIVIODL-50W-30K-WH-90C-24D

Voltage100 - 277 V AC, 50-60 HzLumen Output4263.3lmPower50WEfficacy140lm/wCT3000KCR190Beam Angle24°Light DistributionMediumLED TypeCOBStart TimeInstantDriverSand Alone (included)OrnstructionNor-Swiveling TypeOrnstructionNor-Swiveling TypeDimmingOn-Off / Triac / 0-10 VRouting TypeSingle HeadHeadsSingle HeadFinshMiteHeight6-58°Diameter6-1/2*Diameter6-1/2*DiameterSingle HeadFinshSingle HeadFinshSingle HeadDiameter6-1/2*DiameterSingle HeadFinshSingle HeadDiameter6-1/2*DiameterSingle HeadDiameterSingle HeadDiam		
Power5000000000000000000000000000000000000	Voltage	100 - 277 V AC, 50-60 Hz
FitticacyInternational structureEfficacy400kCCT300kCRI>90Beam Angle24°Light DistributionMediumLED TypeCDBCBSram SOLERIQ S 19Start TimeInstantDriverStand Alone (included)Operating PositoiNon - Swiveling TypeOnoff / Triac / 0-10 VNondMounting TypeRecessedHeadsSingl HeadFinishAluninum Die castFinish6.5/8°Diameter6.1/2°Cut Out3°OpticsBrikght Technology Black, Silver	Lumen Output	4263.3lm
CCT300KCRI>90Bean Angle24°Light DistributionMediumLED TypeCOBLED Light SoureOrsam SOLERIQ S 19Start TimeInstantDriverStand Alone (included)Operating PositionNon - Swiveling TypeOnderf Triac / 0 - DVRoundMounting TypeRecessedHeadsSingle HeadFinishVinieHeight6-J/8"Diameter6-J/8"Cut Out3"OpticesSingle Technology Black, Silver	Power	50W
RNGRI>90Beam Angle4°Light DistributionMediumLED TypeOBLED Light SoureOrsam SOLERIQ S 19Start TimeInstantDriverStand Alone (included)Operating PositonNon Swiveling TypeOnoff / Triac / 0-10 VOnoff / Triac / 0-10 VRounting TypeRecessedHeadsSingle HeadFinishWhiteHeight6-//8°Diameter6-1/2°Cut Out3°OpticsSingle Headneuse StateFinish8-//8°Height6-//8°Diameter6-//8°Optics3°Optics3°OpticsSingle Technology Black, Silver	Efficacy	140lm/w
Rank and the second s	ССТ	3000K
Light DistributionMediumLED TypeCOBLED Light SourceOsram SOLERIQ S 19Start TimeInstantDriverStand Alone (included)Operating PositionNon-Swiveling TypeDimmingOn-Off / Triac / O-10 VConstructionRecessedHeadsSingle HeadBody MaterialWhiteFinishOhiteHeight6-//8"Cut OutSingle Technology Black, Silver	CRI	>90
LED TypeCOBLED Light SoureOsram SOLERIQ S 19Start TimeInstantDriverStand Alone (included)Operating PositionNon - Swiveling TypeDimmingOn-Off / Triac / 0-10 VConstructionRoundMounting TypeRecessedHeadsSingle HeadPoly MaterialAluminu Die castFinishOhiteHeight6-5/8"Cut OutSiOpticsSiOpticsDakight Technology Black, Silver	Beam Angle	24°
LED Light SoureGsram SOLERIQ S 19Start TimeInstantDriverStand Alone (included)Operating PositioNon - Swiveling TypeDimmingOn-Off / Triac / 0-10 VConstructionRoundMounting TypeRecessedHeadsSingle HeadBody MaterialMinium Die castFinishOh-SiHeight6-5/8°Cut Out3"OpticsDanklight Technology Black, Silver	Light Distribution	Medium
Start TimeInstantDriverStand Alone (included)Operating PositionNon - Swiveling TypeDimmingOn-Off / Triac / O-10 VConstructionRoundMounting TypeRecessedHeadsSingle HeadBody MaterialAluminum Die castFinishWhiteHeight6-5/8"Diameter6-1/2"Cut Outs"OpticsDarklight Technology Black, Silver	LED Type	СОВ
DriverStand Alone (included)Operating PositioNon - Swiveling TypeDimmingOn-Off / Triac / 0-10 VConstructionRoundMounting TypeRecessedHeadsSingle HeadBody MaterialAluminium Die castFinishWhiteHeight6-5/8"Diameter6-1/2"Cut Out3"OpticsDarklight Technology Black, Silver	LED Light Source	Osram SOLERIQ S 19
Operating PositionNon - Swiveling TypeDimmingOn-Off / Triac / 0-10 VConstructionRoundMounting TypeRecessedHeadsSingle HeadBody MaterialAluminum Die castFinishWhiteHeight6-5/8"Diameter6-1/2"Cut Out3"OpticsDarklight Technology Black, Silver	Start Time	Instant
DimmingOn-Off / Triac / 0-10 VConstructionRoundMounting TypeRecessedHeadsSingle HeadBody MaterialAluminium Die castFinishWhiteHeight6-5/8"Diameter6-1/2"Cut Out3"OpticsDarklight Technology Black, Silver	Driver	Stand Alone (included)
ConstructionRoundMounting TypeRecessedHeadsSingle HeadBody MaterialAluminum Die castFinishWhiteHeight6-5/8"Diameter6-1/2"Cut Out3"OpticsDarklight Technology Black, Silver	Operating Position	Non - Swiveling Type
Nounting TypeRecessedHeadsSingle HeadBody MaterialAluminium Die castFinishWhiteHeight6-5/8"Diameter6-1/2"Cut Out3"OpticsDarklight Technology Black, Silver	Dimming	On-Off / Triac / 0-10 V
Heads Single Head Body Material Aluminium Die cast Finish White Height 6-5/8" Diameter 6-1/2" Cut Out 3" Optics Darklight Technology Black, Silver	Construction	Round
Body Material Aluminium Die cast Finish White Height 6-5/8" Diameter 6-1/2" Cut Out 3" Optics Darklight Technology Black, Silver	Mounting Type	Recessed
FinishWhiteHeight6-5/8"Diameter6-1/2"Cut Out3"OpticsDarklight Technology Black, Silver	Heads	Single Head
Height 6-5/8" Diameter 6-1/2" Cut Out 3" Optics Darklight Technology Black, Silver	Body Material	Aluminium Die cast
Diameter 6-1/2" Cut Out 3" Optics Darklight Technology Black, Silver	Finish	White
Cut Out 3" Optics Darklight Technology Black, Silver	Height	6-5/8"
Optics Darklight Technology Black, Silver	Diameter	6-1/2"
	Cut Out	3"
And Section Association Consider Destruction Marking Deservation Link United Estructure	Optics	Darklight Technology Black, Silver
Application Area Guest Room, Corridor, Restaurant, Meeting Room Club, Hall, Hotel Entrance	Application Area	Guest Room, Corridor, Restaurant, Meeting Room Club, Hall, Hotel Entrance

1

Beam Spread (Options)

Spot	15°	Medium	24°	Flood	38°	Wide Fl	.00d 60°
ft	Ø	ft	Ø	ft	Ø	ft	Ø
3.0	0.72	3.0	1.41	3.0	2.03	3.0	3.15
9.0	2.15	9.0	4.22	9.0	6.09	9.0	9.45
15.0	3.58	15.0	7.04	15.0	10.15	15.0	15.75

Olivio, a round LED downlight made of aluminum die cast with high quality powder coated luminaire housing and optimum heat sink. Specular reflector & power grid /global connectors available with isolated LED Driver using Ultra bright OSRAM COB.

Technical Data

IES File Link 🕹

Installation Instructions Link 🕹

IP20



retail@ikioledlighting.com I +1 844-533-4546 I www.retail.ikioledlighting.com

© IKIO LED LIGHTING 2025. All Rights Reserved. Products and technologies in this document may be covered by one or more Patents Pending.

The product images shown are for illustration purposes only and may not be an exact representation of the product. Specifications subject to change without notice.