


# Flare Down Lights



## Product Code : IK-RFLAREDL-12W-35K-WH-90C-60D

|                    |                                    |
|--------------------|------------------------------------|
| Voltage            | 100 - 277 V AC, 50-60 Hz           |
| Lumen Output       | 1080lm                             |
| Power              | 12W                                |
| Efficacy           | 90lm/w                             |
| CCT                | 3500K                              |
| CRI                | >90                                |
| Beam Angle         | 60°                                |
| Light Distribution | Wide flood                         |
| LED Light Source   | Osram SOLERIQ S 19                 |
| Start Time         | Instant                            |
| Driver             | Stand Alone (included)             |
| Operating Position | Non - Swiveling Type               |
| Dimming            | On-Off / Triac / 0-10 V            |
| Construction       | Sqaure                             |
| Mounting Type      | Recessed                           |
| Heads              | Single Head                        |
| Finish             | White                              |
| Height             | 2-3/8"                             |
| Diameter           | 4-3/8"x4-3/8"                      |
| Cut Out            | 4"x4"                              |
| Optics             | Darklight Technology Black, Silver |
| Application Area   | Outdoor Corridor, Bathroom, Eave.  |

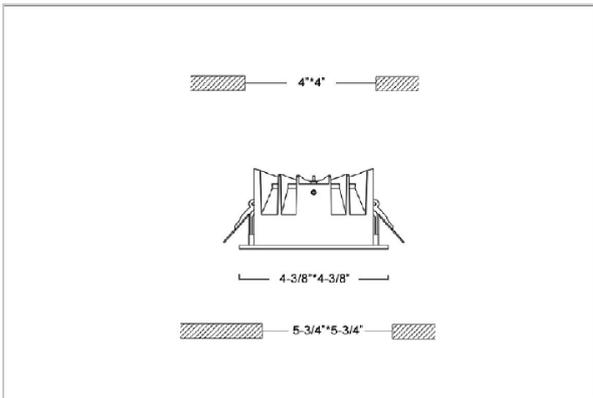

### Beam Spread (Option)

| Wide Flood | 60°   |
|------------|-------|
| ft         | Ø     |
| 3.0        | 3.15  |
| 9.0        | 9.45  |
| 15.0       | 15.75 |

Flare downlight is a square shaped fixture, that illuminates a store in the most effective manner without being obtrusive. The smart engineering of the luminaire with specular reflector & power grid/ global connectors along with high voltage standing in-house LED driver makes it an ideal choice for lighting your stores.