


Flare Down Lights



Product Code : IK-RFLAREDL-30W-40K-WH-90C-60D

Voltage	100 - 277 V AC, 50-60 Hz
Lumen Output	2700lm
Power	30W
Efficacy	90lm/w
CCT	4000K
CRI	>90
Beam Angle	60°
Light Distribution	Wide flood
LED Light Source	Osram SOLERIQ S 19
Start Time	Instant
Driver	Stand Alone (included)
Operating Position	Non - Swiveling Type
Dimming	On-Off / Triac / 0-10 V
Construction	Sqaure
Mounting Type	Recessed
Heads	Single Head
Finish	White
Height	3"
Diameter	6-1/2"x6-1/2"
Cut Out	5-3/4"x5-3/4"
Optics	Darklight Technology Black, Silver
Application Area	Outdoor Corridor, Bathroom, Eave.

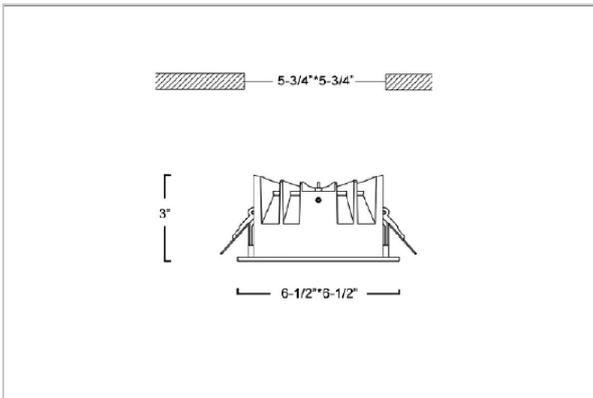

Beam Spread (Option)

Wide Flood	60°
ft	Ø
3.0	3.15
9.0	9.45
15.0	15.75

Flare downlight is a square shaped fixture, that illuminates a store in the most effective manner without being obtrusive. The smart engineering of the luminaire with specular reflector & power grid/ global connectors along with high voltage standing in-house LED driver makes it an ideal choice for lighting your stores.