


Flare Down Lights



Product Code : IK-RFLAREDL-40W-35K-WH-90C-60D

Voltage	100 - 277 V AC, 50-60 Hz
Lumen Output	3600lm
Power	40W
Efficacy	90lm/w
CCT	3500K
CRI	>90
Beam Angle	60°
Light Distribution	Wide flood
LED Light Source	Osram SOLERIQ S 19
Start Time	Instant
Driver	Stand Alone (included)
Operating Position	Non - Swiveling Type
Dimming	On-Off / Triac / 0-10 V
Construction	Sqaure
Mounting Type	Recessed
Heads	Single Head
Finish	White
Height	3"
Diameter	8-1/4"x8-1/4"
Cut Out	7-1/2"x7-1/2"
Optics	Darklight Technology Black, Silver
Application Area	Outdoor Corridor, Bathroom, Eave.

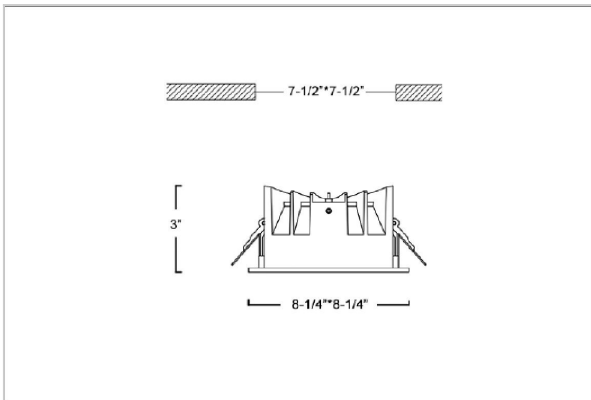

Beam Spread (Option)

Wide Flood	60°
ft	Ø
3.0	3.15
9.0	9.45
15.0	15.75

Flare downlight is a square shaped fixture, that illuminates a store in the most effective manner without being obtrusive. The smart engineering of the luminaire with specular reflector & power grid/ global connectors along with high voltage standing in-house LED driver makes it an ideal choice for lighting your stores.