


# Lunaris Down Lights



## Product Code : IK-DLS2-6IN-15/18/22/26/30W-LV-5CCT-RD

Voltage	120-277V
Lumen Output	3000lm
Power	15-18-22-26-30W
Efficacy	100lm/w
CCT Selectable(K)	2700-3000-3500-4000-5000K
CRI	80 (90 Optional)
Beam Angle	90°
Light Distribution	Ultrawide
LED Type	2835
Dimming	0-10V/ Triac Dimming
Mounting Type	Recessed
Heads	Single Head
Body Material	Die-Casting Aluminum
Finish	White
Height	4.3"
Diameter	8.3"
Cut Out	5.9"
IP Rating	IP54
Cover Material	Polycarbonate
Weight	1.57
Width (W)	5.9"

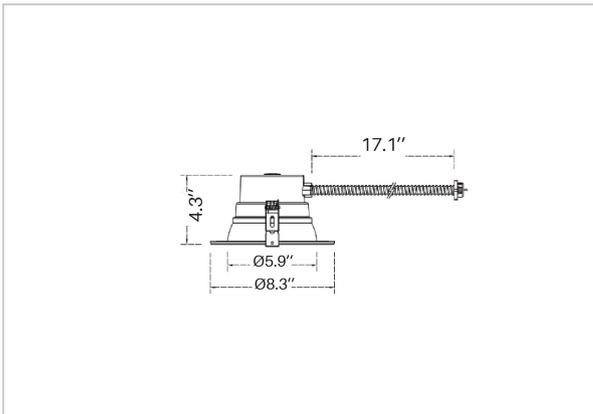

Lunaris merges modern design with high efficiency, making it a versatile downlight for new construction or retrofit projects. Its slim profile and multiple size options provide flexibility for architects and designers. With tool-free installation, Lunaris ensures quick project turnaround. Durable aluminum housing and excellent thermal performance guarantee reliability, making Lunaris a sustainable, cost-effective choice for commercial, institutional, and retail environments needing lasting illumination.