


Lunaris Down Lights



Product Code : IK-DLS2-6IN-20/25/30/35/40W-LV-5CCT-RD

Voltage	120-277V
Lumen Output	4000lm
Power	20-25-30-35-40W
Efficacy	100lm/w
CCT Selectable(K)	2700-3000-3500-4000-5000K
CRI	80 (90 Optional)
Beam Angle	90°
Light Distribution	Ultrawide
LED Type	2835
Dimming	0-10V/ Triac Dimming
Mounting Type	Recessed
Heads	Single Head
Body Material	Die-Casting Aluminum
Finish	White
Height	4.3"
Diameter	8.3+A8:AF8
Cut Out	5.9"
IP Rating	IP54
Cover Material	Polycarbonate
Weight	1.57
Width (W)	5.9"

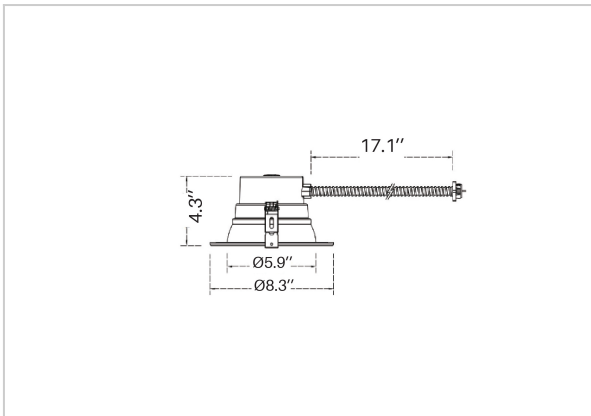

Lunaris merges modern design with high efficiency, making it a versatile downlight for new construction or retrofit projects. Its slim profile and multiple size options provide flexibility for architects and designers. With tool-free installation, Lunaris ensures quick project turnaround. Durable aluminum housing and excellent thermal performance guarantee reliability, making Lunaris a sustainable, cost effective choice for commercial, institutional, and retail environments needing lasting illumination.