


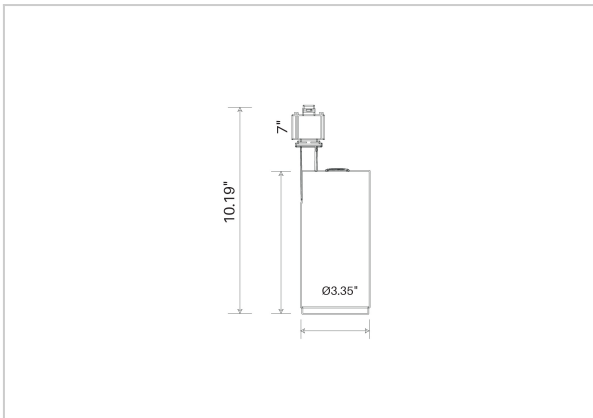

### Product Code : IK-TLS4-25W-5CCT-30D-BL

|                    |                           |
|--------------------|---------------------------|
| Voltage            | 120V                      |
| Lumen Output       | 2500lm                    |
| Power              | 25W                       |
| Efficacy           | 100lm/w                   |
| CCT Selectable(K)  | 2700-3000-3500-4000-5000K |
| CRI                | 90                        |
| Beam Angle         | 30°                       |
| Light Distribution | Wide                      |
| LED Type           | COB                       |
| LED Light Source   | Bridgelux                 |
| Dimming            | Triac                     |
| Mounting Type      | Track Light Structure     |
| Heads              | Single Head               |
| Body Material      | Aluminum                  |
| Finish             | Black                     |
| Height             | 10.3"                     |
| Diameter           | 3.3"                      |
| Cover Material     | PMMA                      |
| Weight             | 1.76                      |

#### Beam Spread (Options)

| Medium | 24°  | Wide | 30°  | Ultrawide | 60°   |
|--------|------|------|------|-----------|-------|
| ft     | Ø    | ft   | Ø    | ft        | Ø     |
| 3.0    | 0.72 | 3.0  | 1.41 | 3.0       | 2.03  |
| 9.0    | 2.15 | 9.0  | 4.22 | 9.0       | 6.09  |
| 15.0   | 3.58 | 15.0 | 7.04 | 15.0      | 10.15 |

This sleek track light blends adaptability and style, making it ideal for architectural and commercial interiors. Its slim form fits effortlessly into modern spaces while delivering consistent, bright illumination. Perfect for displays, offices, or retail environments. Optivus supports smooth dimming and precise adjustments. A versatile solution for projects needing both functional brightness and refined aesthetics, it simplifies planning without compromising on ambience or impact.