




Aurora Pendant Lights

Technical Data Sheet

ITEM SKU#: 662187502304

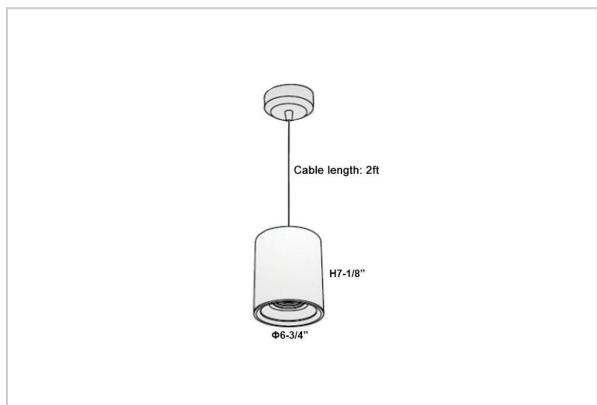

Product Code : IK-RAuroraPL-50W-30K-BL-90C-15D

Voltage 100 - 277 V AC, 50-60 Hz

Lumen Output 4250lm

Power 50W

CCT 3000K

CRI >90

Beam Angle 15°

Light Distribution Spot

LED Light Source Osram SOLERIQ S 19

Start Time Instant

Driver Stand Alone (included)

Operating Position No Swiveling Type

Dimming Triac Dimming / 0-10 V Dimming

Heads Single Head

Finish Black

Height 7-1/8"

Diameter 6-3/4"

Optics Reflective Cup Structure

Application Area Guest Room, Restaurant, Meeting Room, Club, Hall, Hotel Entrance

Beam Spread (Options)

| Spot | 15° | Medium | 30° | Flood | 45° |
|------|------|--------|------|-------|-------|
| ft | Ø | ft | Ø | ft | Ø |
| 3.0 | 0.72 | 3.0 | 1.41 | 3.0 | 2.03 |
| 9.0 | 2.15 | 9.0 | 4.22 | 9.0 | 6.09 |
| 15.0 | 3.58 | 15.0 | 7.04 | 15.0 | 10.15 |

Aurora is a technologically advanced LED Pendant Light that incorporates electronic gear and a high-quality lens with wide beam spread. While commonly used as task light, the unique and state-of-the-art design of this luminaire also enhances the overall aesthetics of your store.

