




Aurora Pendant Lights

Technical Data Sheet

ITEM SKU#: 662187502939

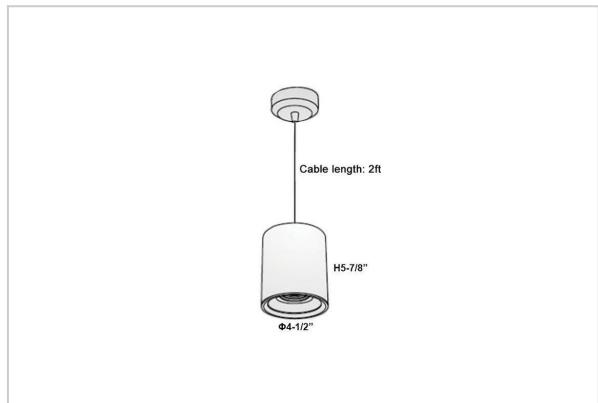

Product Code : IK-RAuroraPL-25W-40K-BL-90C-30D

Voltage 100 - 277 V AC, 50-60 Hz

Lumen Output 2250lm

Power 25W

CCT 4000K

CRI >90

Beam Angle 30°

Light Distribution Medium

LED Light Source Osram SOLERIQ S 19

Start Time Instant

Driver Stand Alone (included)

Operating Position No Swiveling Type

Dimming Triac Dimming / 0-10 V Dimming

Heads Single Head

Finish Black

Height 5-7/8"

Diameter 4-1/2"

Optics Reflective Cup Structure

Application Area Guest Room, Restaurant, Meeting Room, Club, Hall, Hotel Entrance

Beam Spread (Options)

Spot	15°	Medium	30°	Flood	45°
ft	Ø	ft	Ø	ft	Ø
3.0	0.72	3.0	1.41	3.0	2.03
9.0	2.15	9.0	4.22	9.0	6.09
15.0	3.58	15.0	7.04	15.0	10.15

Aurora is a technologically advanced LED Pendant Light that incorporates electronic gear and a high-quality lens with wide beam spread. While commonly used as task light, the unique and state-of-the-art design of this luminaire also enhances the overall aesthetics of your store.

