


ITEM SKU#: 662187504650

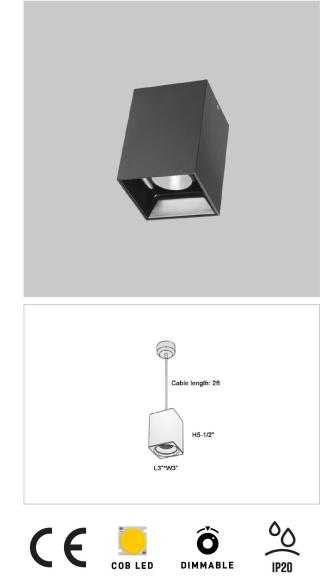

Product Code : IK-REosPL-15W-40K-BL-90C-30D

Voltage	100 - 277 V AC, 50-60 Hz
Lumen Output	1350lm
Power	15W
ССТ	4000K
CRI	>90
Beam Angle	30°
Light Distribution	Medium
LED Light Source	Osram SOLERIQ S 19
Start Time	Instant
Driver	Stand Alone (included)
Operating Position	No Swiveling Type
Dimming	Triac Dimming / 0-10 V Dimming
Heads	Single Head
Finish	Black
Length	3"
Height	5-1/2"
Optics	Reflective Cup Structure
Width (W)	3"
Application Area	Guest Room, Restaurant, Meeting Room, Club, Hall, Hotel Entrance

Spot 15' Medium 30' Flood 45' ft Ø ft Ø ft Ø 3.0 0.72 3.0 1.41 3.0 2.03 9.0 2.15 9.0 4.22 9.0 6.09	Beam Spread (Options)								
3.0 0.72 3.0 1.41 3.0 2.03	Spot	15°	Medium	30°	Flood	45°			
	ft	Ø	ft	Ø	ft	Ø			
9.0 2.15 9.0 4.22 9.0 6.09	3.0	0.72	3.0	1.41	3.0	2.03			
	9.0	2.15	9.0	4.22	9.0	6.09			
15.0 3.58 15.0 7.04 15.0 10.15	15.0	3.58	15.0	7.04	15.0	10.15			

Eos is a technologically advanced LED Pendant Light that incorporates electronic gear and a high-quality lens with wide beam spread. While commonly used as task light, the unique and state-of-the-art design of this luminaire also enhances the overall aesthetics of your store.

retail@ikioledlighting.com I +1 844-533-4546 I www.retail.ikioledlighting.com

© IKIO LED LIGHTING 2025. All Rights Reserved. Products and technologies in this document may be covered by one or more Patents Pending. The product images shown are for illustration purposes only and may not be an exact representation of the product. Specifications subject to change without notice.

