


# Alem Track Lights

ITEM SKU#: 662187489766

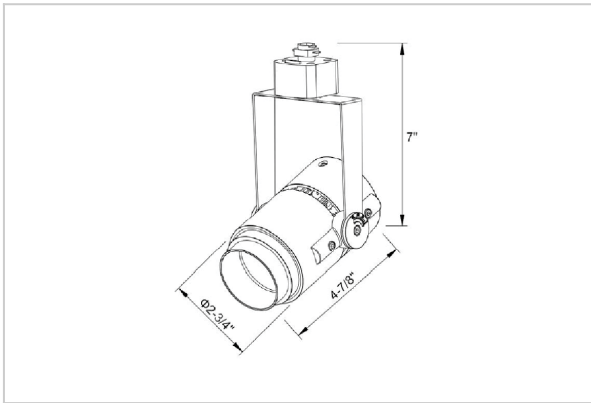

## Product Code : IK-RALEMTL-30W-50K-WH-90C-60D

|                    |                          |
|--------------------|--------------------------|
| Voltage            | 100 - 277 V AC, 50-60 Hz |
| Lumen Output       | 3013.46lm                |
| Power              | 30W                      |
| Efficacy           | 140lm/w                  |
| CCT                | 5000K                    |
| CRI                | >90                      |
| Beam Angle         | 60°                      |
| Light Distribution | Wide flood               |
| LED Type           | COB                      |
| LED Light Source   | Bridgelux V13            |
| Start Time         | Instant                  |
| Driver             | IK-LKAD029DC-05242       |
| Operating Position | Swiveling Type           |
| Dimming            | 0-10V                    |
| Construction       | Track                    |
| Mounting Type      | Track Light Structure    |
| Heads              | Single Head              |
| Body Material      | Aluminium Die cast       |
| Finish             | White                    |
| Length             | 5-1/2"                   |
| Height             | 7-3/4"                   |
| Diameter           | 3-1/2"                   |
| Application Area   | Indoor Applications      |

### Beam Spread (Options)

| Spot | 15°  | Medium | 24°  | Flood | 38°   | Wide Flood | 60°   |
|------|------|--------|------|-------|-------|------------|-------|
| ft   | Ø    | ft     | Ø    | ft    | Ø     | ft         | Ø     |
| 3.0  | 0.72 | 3.0    | 1.41 | 3.0   | 2.03  | 3.0        | 3.15  |
| 9.0  | 2.15 | 9.0    | 4.22 | 9.0   | 6.09  | 9.0        | 9.45  |
| 15.0 | 3.58 | 15.0   | 7.04 | 15.0  | 10.15 | 15.0       | 15.75 |

Alem is a technologically advanced LED track light with incorporated electronic gear and chip on board. It also has a high-quality reflector with three different beam spreads. Moreover, the lamp housing of die-cast aluminium for optimal cooling allows the fixture to last longer than its traditional counterparts.

## Technical Data

[IES File Link](#)
[Installation Instructions Link](#)